# Craft Ledbar Series

CiBALi
Led Lighting Modules Design Application Services

Casing ALU | Diffuser PC | OSRAM On Board | JTLSMX 2835 | System Productivity 106 lm/W | 3SDCM | CRI80+ | CRI90+ Optional Available | Dimmable | 24V

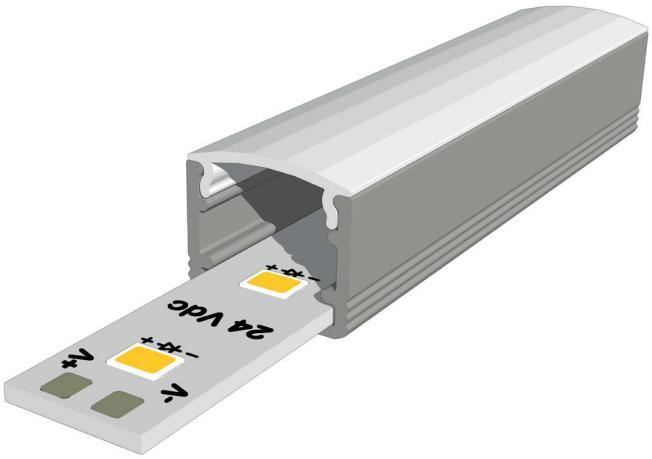


DALI | CE | IP 40

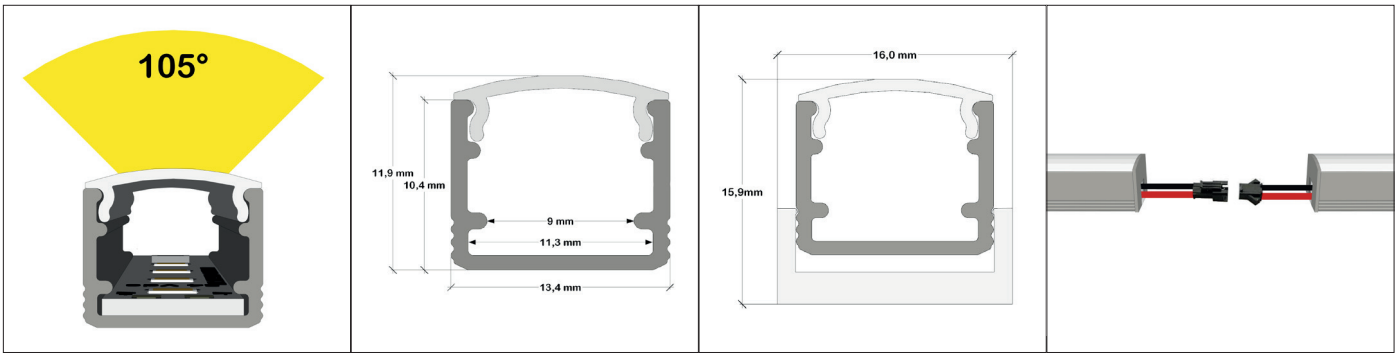


| Product Code | mt. / LED Quantity | Vf typ. | If typ. | Consumption (W/mt.) | Colour CCT (Kelvin) | Luminous Flux(lm/mt.) | Productivity of the Ledbar |
|---|---|---|---|---|---|---|---|
| **SLM120DR-120LED-24V** | 120 LED/mt. | 24 V | 0.29 A/mt. | 7 W/mt. | 2700K | 680 lm | 97 lm/W |
| | | | | | 3000K | 700 lm | 100 lm/W |
| | | | | | 4000K | 745 lm | 106 lm/W |
| | | | | | 6500K | 745 lm | 106 lm/W |
| | | | 0.50 A/mt. | 12 W/mt. | 2700K | 1115 lm | 93 lm/W |
| | | | | | 3000K | 1155 lm | 96 lm/W |
| | | | | | 4000K | 1225 lm | 102 lm/W |
| | | | | | 6500K | 1225 lm | 102 lm/W |

* Production tolerance of luminous flux and productivity: ±10%

All Rights Reserved for **CIBALI ELEKTRONIK SAN.TIC.LTD.STI.** | Osmaniye Mah. Çırpıcı Kosuyolu Sok. No: 5/3 Bakırköy / Istanbul / TURKEY | Tel: +90 212 235 35 81 **www.cibali.com.tr**