
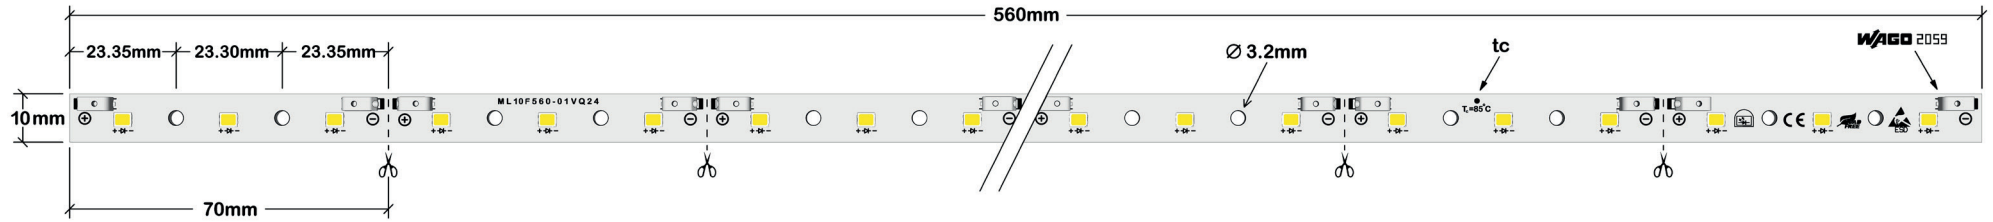




Technical Data

Beam Angle	120°
Ambient Temp. (Ta)	-30...+50°C
Tp rated	+65°C
Tc	+85°C
Eyesafety Report	EIC 62471
Life Test Report	EIS LM-80
LVD Test Report	EIC 62031



Product Code	LED Quantity	V _f typ.	I _f	Consumption (W)	Color CCT (Kelvin)	Luminous Flux(lm) Tp:25°C	Bin (Rank) Code	Efficiency of the Module
ML10F560-01VQ24	24 LED	22.4 V	250mA	5.6 W	2700K	950lm	KK	169lm/W
					3000K	970lm	KL	174lm/W
					4000K	1020lm	KM	183lm/W
					6500K	1020lm	KM	183lm/W
		22.8 V	350mA	8.0 W	2700K	1300lm	KK	161lm/W
					3000K	1330lm	KL	166lm/W
					4000K	1400lm	KM	175lm/W
					6500K	1400lm	KM	175lm/W

* Production tolerance of luminous flux and efficiency: ±10%