
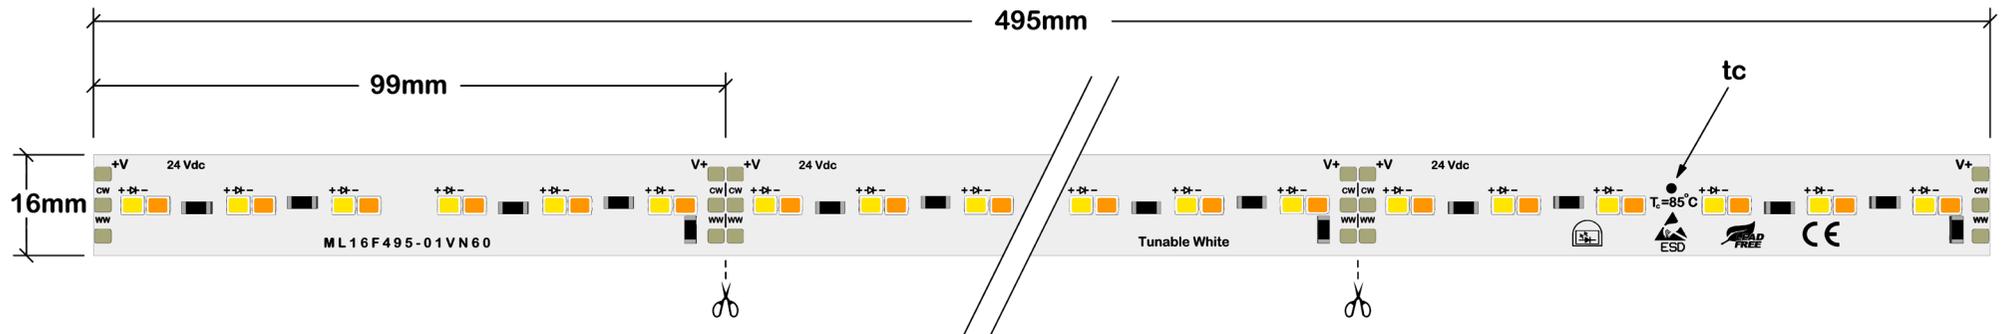


Technical Data

Beam Angle	120°
Ambient Temp. (Ta)	-30...+50°C
Tp rated	+65°C
Tc	+85°C
Eyesafety Report	EIC 62471
Life Test Report	EIS LM-80
LVD Test Report	EIC 62031
UL Compliant	E349212

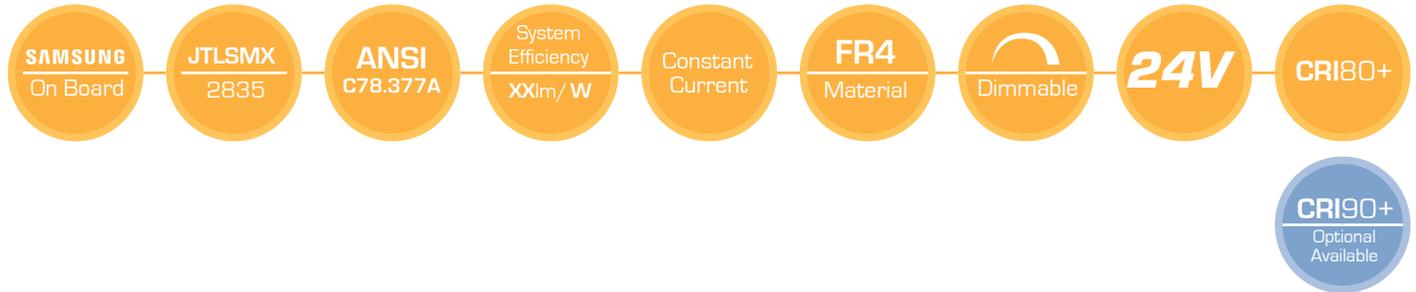

Product Code	LED Quantity	Vf typ.	If/mt.	Consumption (w/mt.)	Color CCT (Kelvin)	Luminous Flux(lm/mt.) TP:25°C	Bin Code	Efficacy of the Module
ML16F495-01VN60	120 LED	24 V	2 Channel	7 W/mt	2700K	880 lm	SE	126 lm/W
					6500K	930 lm		133 lm/W
				14 W/mt	2700K	1710 lm	SE	122 lm/W
					6500K	1790 lm		128 lm/W
				21 W/mt	2700K	2470 lm	SE	117 lm/W
					6500K	2600 lm		124 lm/W

* Production tolerance of luminous flux and efficiency: ±10%